



Louvre window System naco


status:		<input type="checkbox"/> enquiry	<input type="checkbox"/> order	
project number:		purchase order:		
project manager:		phone number:		
desired delivery date:		date:		
project:				
delivery address:				
contact person on site:				
Item:	01	02	03	
no.:				
frame dimensions	width: (mm)			
	height: (mm)			
	standard height / no. of blades /	191mm 1 blade 331mm 2 blades 471mm 3 blades 610mm 4 blades 750mm 5 blades	890mm 6 blades 1029mm 7 blades 1169mm 8 blades 1309mm 9 blades 1449mm 10 blades	1588mm 11 blades 1728mm 12 blades 1867mm 13 blades 2007mm 14 blades ... (+140mm +1)
	Differences between the height of the opening and standard sizes will be bridged by using a solid adapter element.			
	type of frame:	<input type="checkbox"/> type 1 <input type="checkbox"/> type 2 (depend on control)	<input type="checkbox"/> type 1 <input type="checkbox"/> type 2 (depend on control)	<input type="checkbox"/> type 1 <input type="checkbox"/> type 2 (depend on control)
	Glazing profile:	<input type="checkbox"/> without <input type="checkbox"/> with thickness: _____ mm (see detail glazingprofile)	<input type="checkbox"/> without <input type="checkbox"/> with thickness: _____ mm (see detail glazingprofile)	<input type="checkbox"/> without <input type="checkbox"/> with thickness: _____ mm (see detail glazingprofile)
blade panel type	blade height:	152mm	152mm	
	type of blade / type of glass:	<input type="checkbox"/> Elipsoid AL-profile <input type="checkbox"/> toughened glass 6mm	<input type="checkbox"/> Elipsoid AL-profile <input type="checkbox"/> toughened glass 6mm	<input type="checkbox"/> Elipsoid AL-profile <input type="checkbox"/> toughened glass 6mm
finish	finish:	<input type="checkbox"/> powder coated <input type="checkbox"/> natural anodised	<input type="checkbox"/> powder coated <input type="checkbox"/> natural anodised	<input type="checkbox"/> powder coated <input type="checkbox"/> natural anodised
	colour supplier & RAL colour:			
controls	type of control:	<input type="checkbox"/> manual <input type="checkbox"/> electric _____ V	<input type="checkbox"/> manual <input type="checkbox"/> electric _____ V	<input type="checkbox"/> manual <input type="checkbox"/> electric _____ V
	description:			
	cable length: (standard = 2,5m)	_____ m	_____ m	_____ m
	cable exit: (LAH 61 only)	<input type="checkbox"/> top <input type="checkbox"/> bottom <input type="checkbox"/> side through frame	<input type="checkbox"/> top <input type="checkbox"/> bottom <input type="checkbox"/> side through frame	<input type="checkbox"/> top <input type="checkbox"/> bottom <input type="checkbox"/> side through frame
	control position:	<input type="checkbox"/> position A (right side) <input type="checkbox"/> position B (left side) height _____ mm	<input type="checkbox"/> position A (right side) <input type="checkbox"/> position B (left side) height _____ mm	<input type="checkbox"/> position A (right side) <input type="checkbox"/> position B (left side) height _____ mm
fixing brackets / special adaptor:				

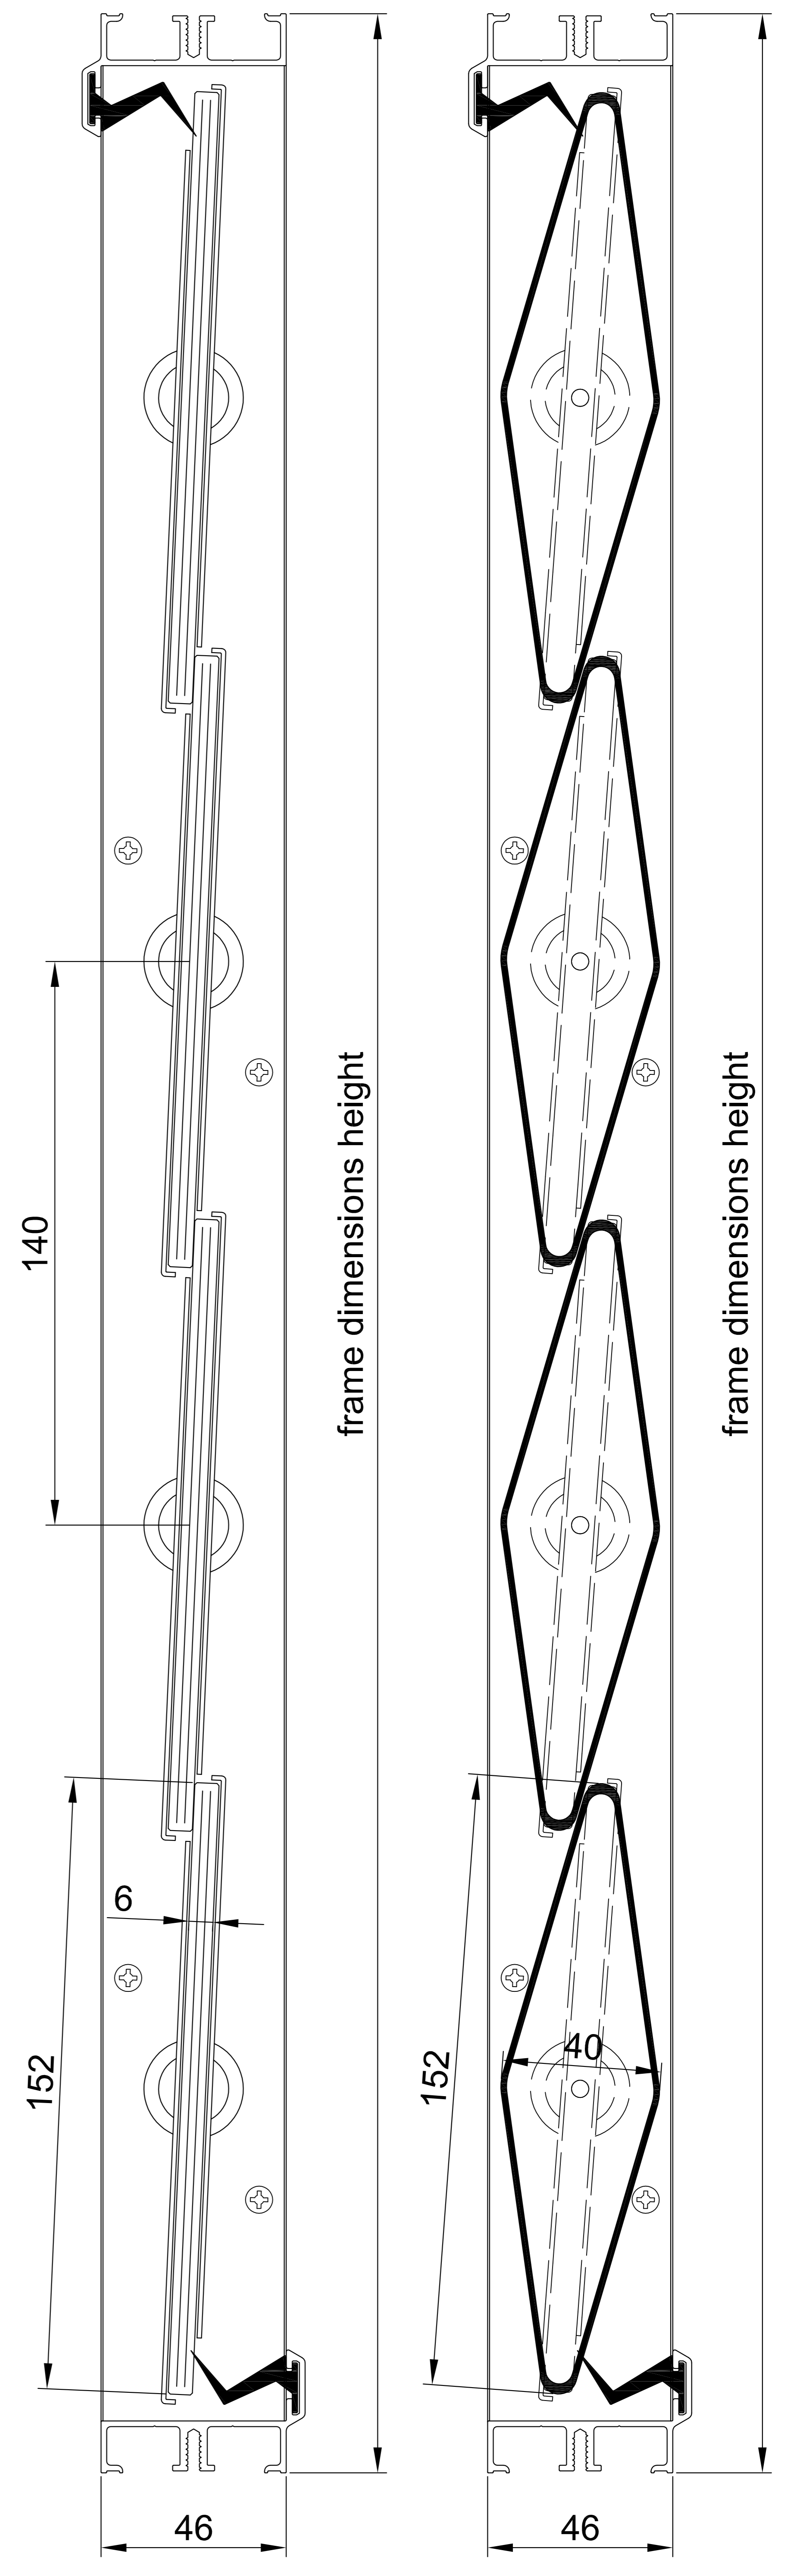

Frame type 1

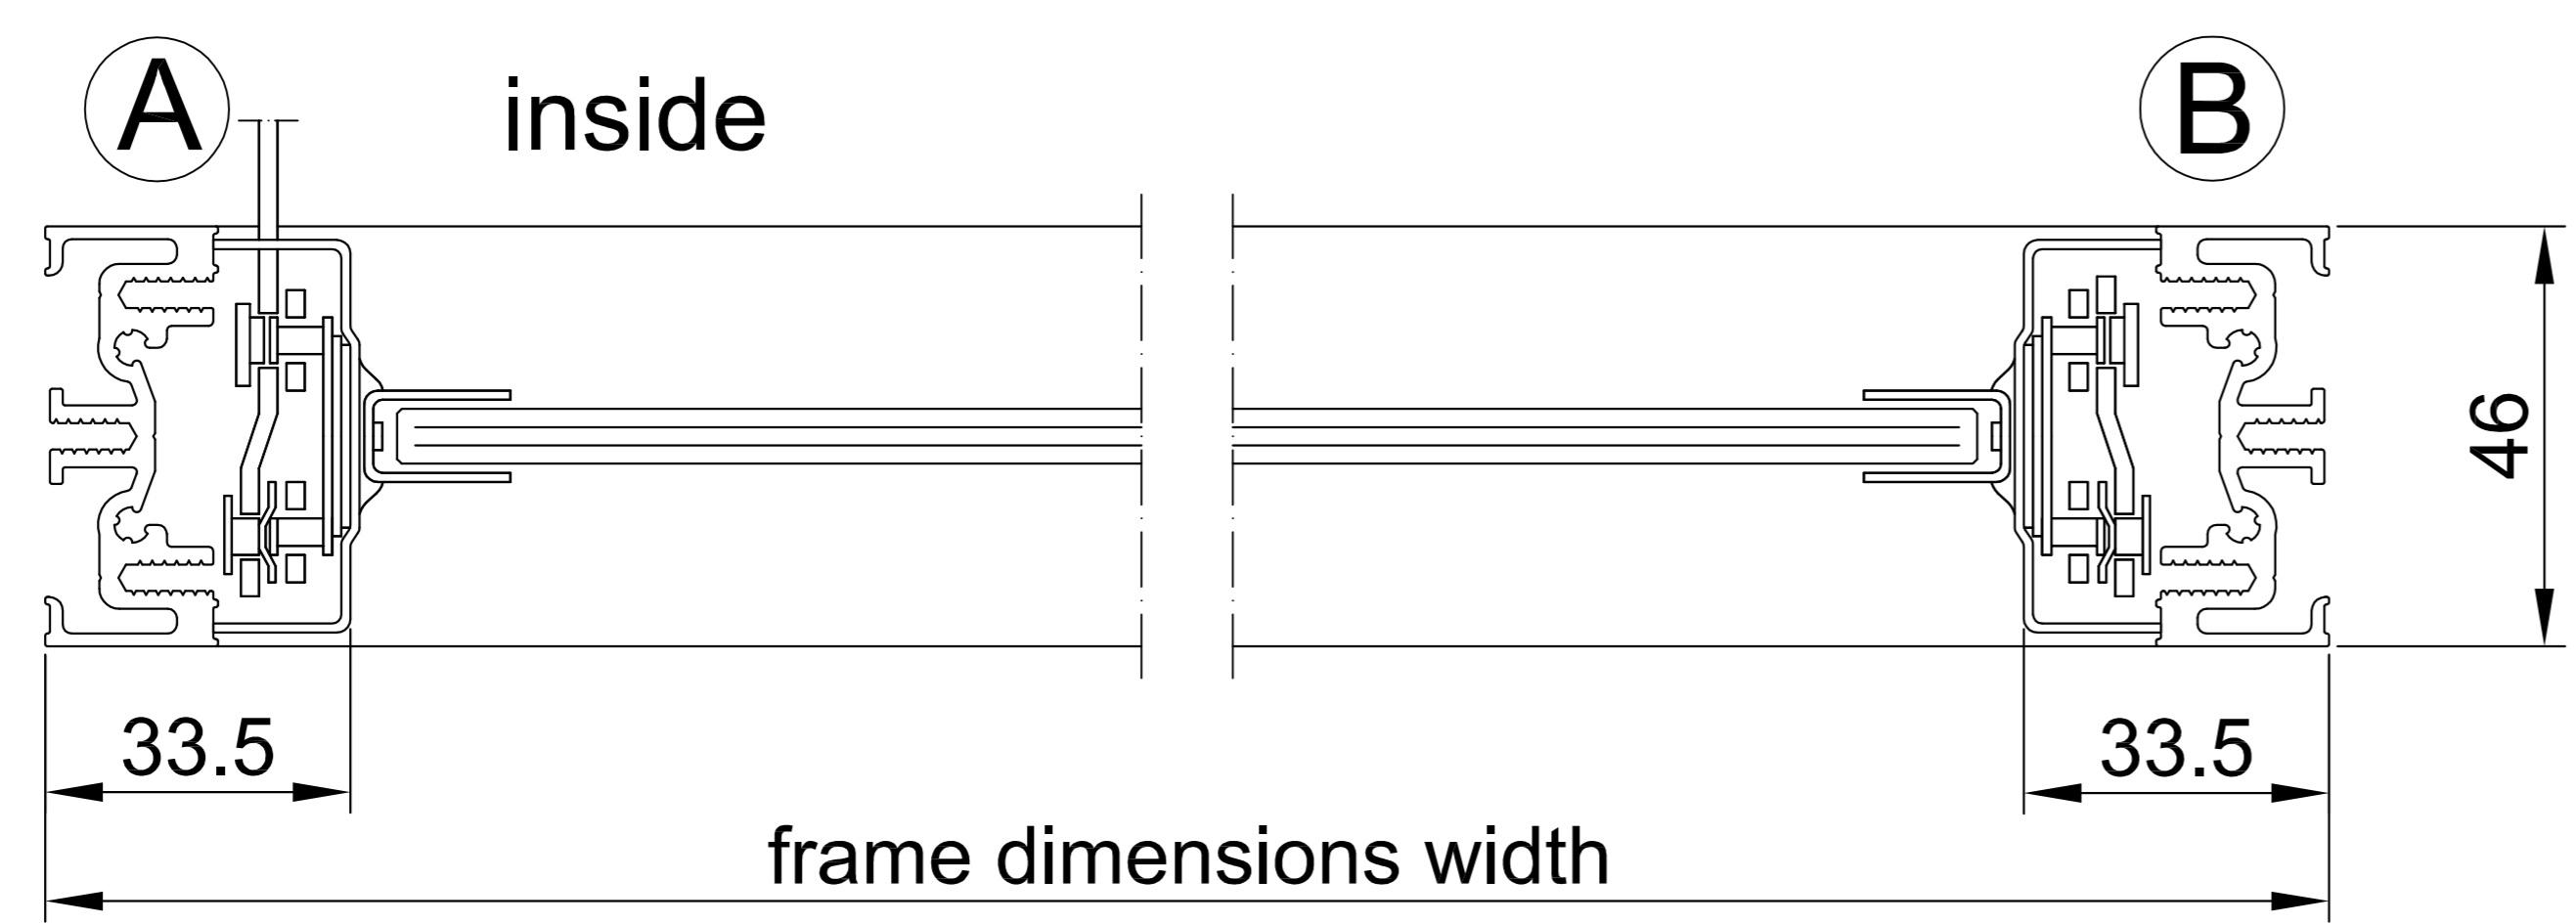

Frame type 2

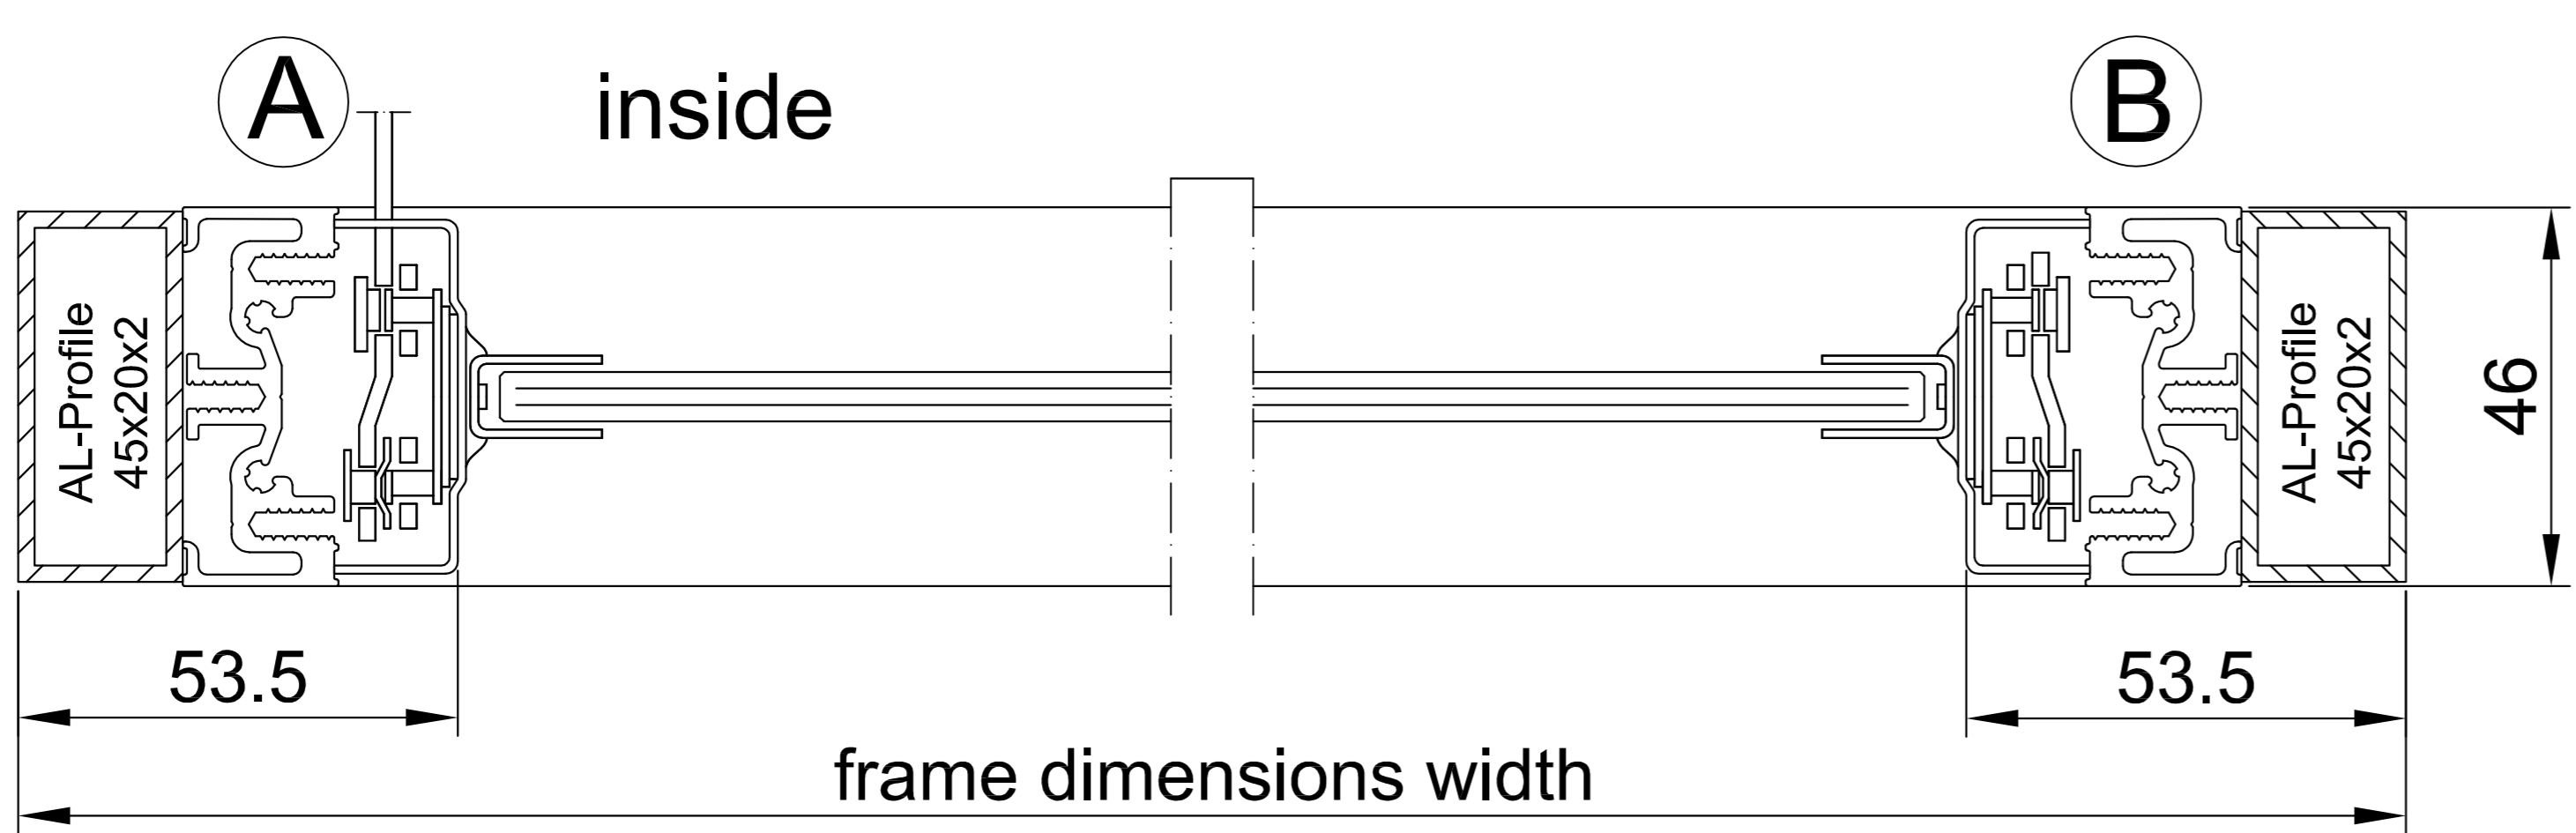

Detail glazingprofile

